


ERCO Light System DALI



120V-240V
50-60Hz

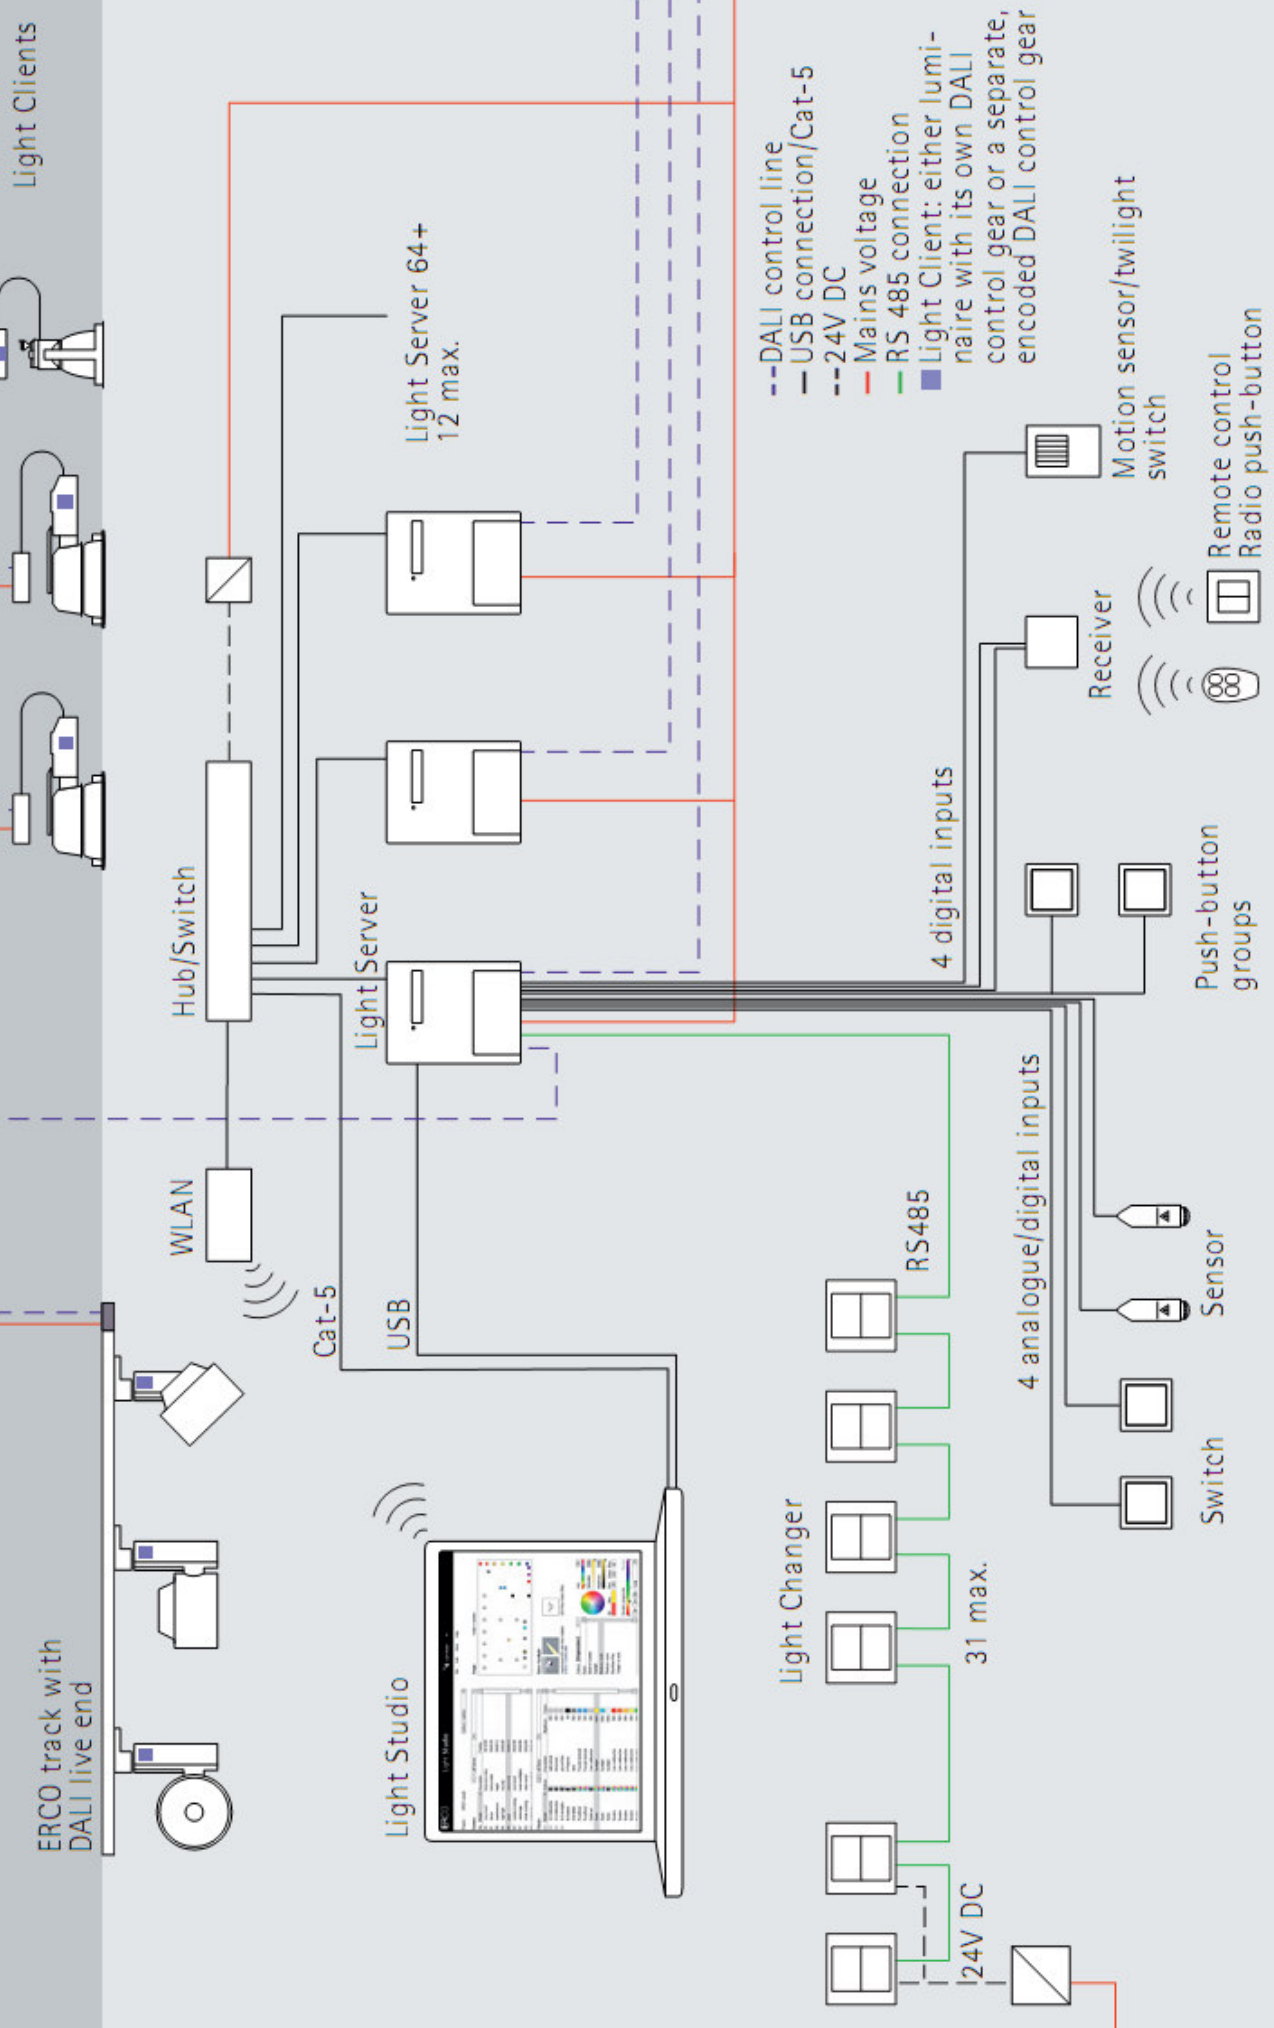

- DALI control line
- USB connection/Cat-5
- 24V DC
- Mains voltage
- RS 485 connection
- Light Client: either luminaire with its own DALI control gear or a separate, encoded DALI control gear

Light Studio

Light Server

Hub/Switch

Light Server 64+
12 max.

Light Changer

31 max.

24V DC

4 analogue/digital inputs

4 digital inputs

Receiver

Motion sensor/twilight switch

Remote control Radio push-button

Push-button groups

Sensor

Light Server 64+

Kontroler sa memorisanim sistemskim i scenografskim podacima. On kontroliše i upravlja rasvetom. Kroz Light Studio programski paket se programira.

Moguće je na jedan Light Server 64+ povezati 64 svetlosna klijenta preko DALI interfejsa i 31 Light Changer-a preko RS485. Više njih (do 12) je moguće umrežiti u ethernet mrežu cat5e kablovima. Povezivanje sa PC se dešava preko USB ili etherneta.


Na jedan Light Server 64+ se može još povezati 8 analogno/digitalnih ulaza.



Light Changer

Prekidač za menjanje scena i sekvenca. Omogućuje korisniku menjanje scenskih i vremenskih programa, kao i uključivanje/isključivanje sistema.


Poseduje LCD ekran osetljiv na dodir.

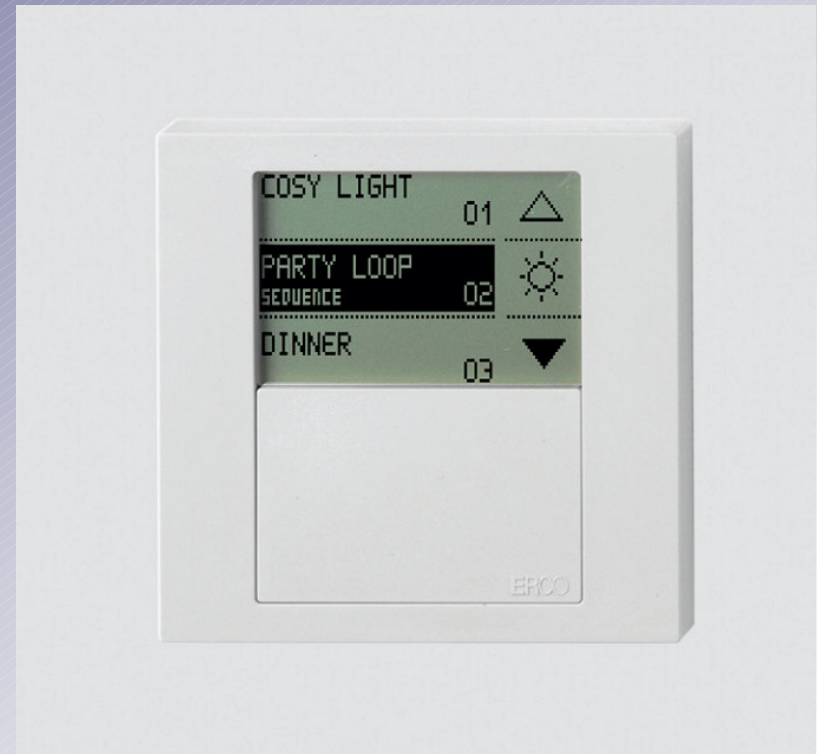

Light Studio

Programski paket za PC računare sa Windows 2000, XP, Vista operativnim sistemom.

Pomoću ovog softvera se programiraju scene i sekvence.

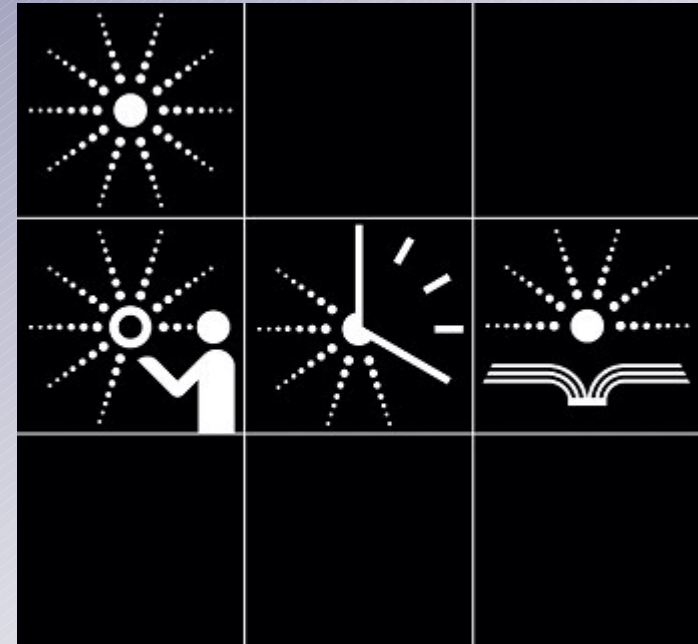

Klijenti

Svetiljke ERCO sa DALI kontrolerima ili zasebni DALI kontroleri.

